



## 9260FZ Oras Electra Safety Tvättställsblandare, 3 V, Bluetooth

EAN: 6414150101663  
RSK: 8430042  
[static.oras.com/9260FZ](https://static.oras.com/9260FZ)



Electra 92 series give you a clean classic design with beautiful round body flowing into round spout design with a clear design line framing the faucet design.

A Classic design for any installation.

### Key Features

Aerator with Tilt function +/- 10° for more flexible installation

Newest Sensor technology for better detection and operation comfort

Bluetooth technology for easy adjustment to personalize settings

Antiscalding protection

Temperature measurement

Battery and power cable

Bluetooth Touchless faucet with tilt aerator. +/- 10° adjustment option.

Easy grip temperature lever for good grip and easy adjustment.

SMART intelligent bluetooth sensor with 3 optical lenses for improved performance supported by app connection for personalized and easy adjustment of sensor settings.

Intelligent temperature measurement and intelligent Antiscalding protection.

Brass casted construction and easy installation due to fast and easy 3S installation system.

- Tvättställ
- Public, Industri, Housing
- Beröringsfri, Batteridrivnen, Separat transformator, Bluetooth®
- Bänkmonterad
- Krom
- Fast utloppspip
- PCA® - konstantflödesstrålsamlare oavsett tryck, Justerbar flödesvinkel
- Temperaturvred
- Justerbar varmvattenspärr (eftermonterbar)
- Manuell blandningsventil för temperaturreglering, Backventil(er), Smutsfilter
- Advanced PSD sensor, Ljusindikerad funktion(er), Indikator för lågt batteri
- Flexibel anslutning
- Oras 3S-Installation för snabb, säker och enkel montering

## Teknisk data

### Flödesegenskaper

Flöde vid 300 kPa (med flödesbegränsare)	0.1 l/s
Tryckfall vid flöde (0.1 l/s)	300 kPa

### Tekniska egenskaper

Varmvattenanslutning	max. +70°C
Arbetstryck	100 - 1000 kPa
Anslutning, mått	G3/8
Projection	123 mm
Backflow prevention (EN1717)	EB
Material	brass

### Programinställningar





Efterflödestid	3 s (1-20 s)
Automatisk spolning	off (off/1-120 h)
Automatisk spolningsperiod	30 s (1-1800 s)
Max. flödestid	2 min (1 - 1800 s)


### Elektroniska egenskaper

El-anslutning	9 V
Batteri	AA 1.5 V Lithium x 2
Bluetooth version	5.x (D060576)

### Bestämmelser

EU Direktiv	CE Radio Equipment Directive 2014/53/EU, Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU
EN standard	EN 15091, ETSI EN 301 489-1 V1.9.2, ETSI EN 300 328 v2.2.2, EN 61000-6-1:2007, EN 61000-6-3:2007+A1:2011+AC:2012, EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4
Ljudklass	I (ISO 3822)
Kapslingsklass	IP 55

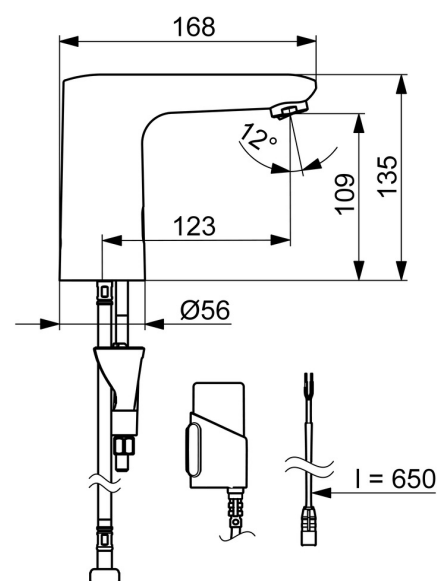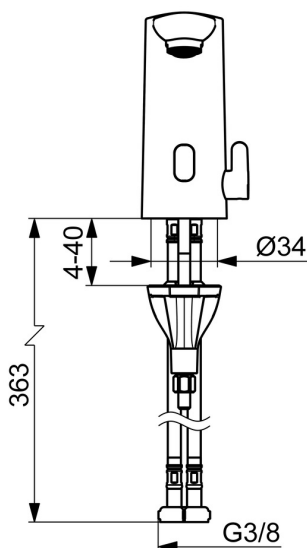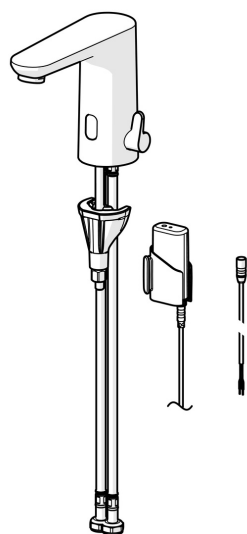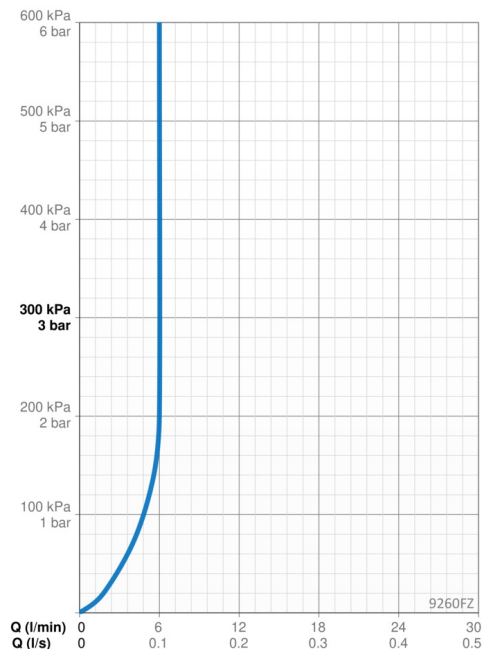

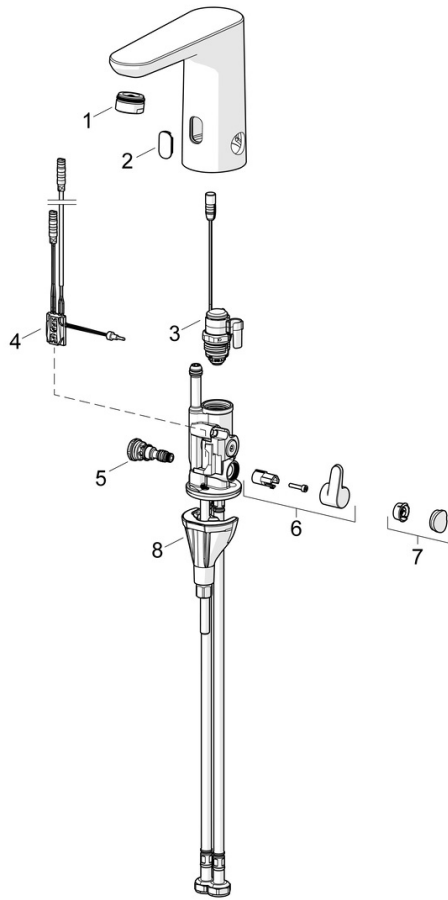

**SP9260FZ**

	<b>Namn</b>	<b>Kod</b>	<b>RSK</b>
01	Strålsamlare, M24x1 HC PCA 7.0 l/min	1016723V	
02	Skyltfönster	1014281V	
03	Magnetventil, 3 V	601307V	8483174
04	Sensor, 6/12 V, Bluetooth	1015155V	
05	Blandningsventil	1000580V	
06	Temperaturratt	1016155V	
07	Plugg	1015252V	
08	Monteringsatts	602610V	8393996
N.I.	Batteri, 1.5 V AA Lithium	600599V	8443259